


× = Pillar below, Ø 141
 — Bulkhead watertight
 - - - Web frames

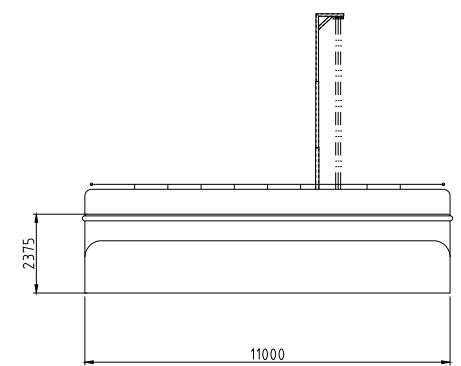

KAPACITETSPLAN ALFRED
 -max djupgående 2,0 meter
 -maximal utbredd last
 5,6 ton/kvm för #3-5 + #15-17
 7,4 ton/kvm för övrig däcksyta.

NOTES:
 1 Frames 2,6, 12,14,16,18: Beam top/bottom 500x200x10x16
 2 Frames 4,7,9,11,13: Beam top/bottom 670x320x10x20.

DIMENSIONS:
 Length: 32,4 m
 Breadth: 11,0 m
 Dept: 2,35 m

Rev.	Date	Description	Made by	Chk'd by	Disc. by	Client
PROJECT :		PROJECT NO. :	CUSTOMER :			
TITLE :		SCALE :	DATE :		CONTR. :	
ALFRED		1:100 (A2)				
KAPACITETSPLAN			DRAWING NO. :	REV.:		
			2026-02-12	1		
REPLACES :			REPLACED BY :			